

TYPE 2016

Plug for safety class II

2-pole plug


NBR 14136

12 A/16 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

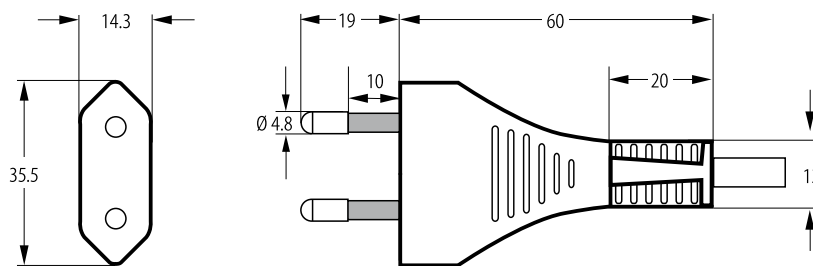

Approvals



Suitable flexible cord types

H05VVH2-F	2 x 1	H05V2V2-F	2 x 1.5
H05VV-F	2 x 1	H05VV-F	2 x 1.5
H05RR-F	2 x 1	H05RR-F	2 x 1.5
H05RN-F	2 x 1	H07RN-F	2 x 1
H07RN-F	2 x 1.5		