

TYPE 206

Plug for safety class II

2-pole plug


NBR 14136, CEI 23-50

2.5 A/10 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

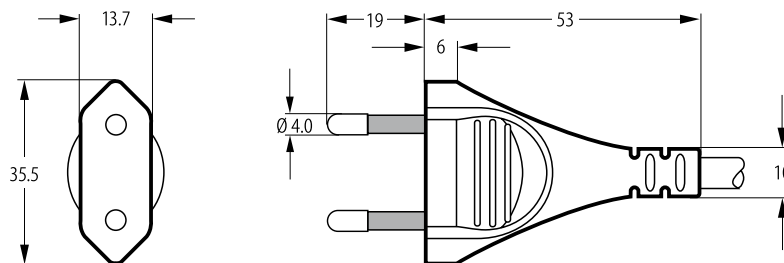

Approvals



Suitable flexible cord types

H03VVH2-F	2 x 0.5	H03VVH2-F	2 x 0.75
H05VVH2-F	2 x 0.75	H05VVH2-F	2 x 1
H05V2V2H2-F	2 x 0.75	H05V2V2H2-F	2 x 1
H05VV-F	2 x 0.75	H05VV-F	2 x 1
H05V2V2-F	2 x 0.75	H05V2V2-F	2 x 1
H05RN-F	2 x 0.75	H05RN-F	2 x 1
H03Z1Z1H2-F	2 x 0.75	H05Z1Z1H2-F	2 x 0.75
H05Z1Z1H2-F	2 x 1	H05Z1Z1-F	2 x 0.75
H05Z1Z1-F	2 x 1		